

特点

- JAM 类型压接机器安装方式
- 精确的压接高度 (C/H) 调节盘
- 喇叭口易于调整
- 具有侧送料及直送料方式
- 压接刀及底刀可用于JAM类型的模具上
- 公制零部件



HDE 是泰科优质模具家族中的一员，它可使用于通常在亚洲应用的JAM类型的端子机上。HDE模具对线芯及绝缘部分均拥有精确及范围宽广的压接高度调节盘。该高度调整功能提供了线束加工中更宽广的压接机器选择范围，以及更容易的压接质量管理。



绝缘部分压接高度调节



线芯部分压接高度调节

规格

项目		侧送料	直送料
压接高度调节盘	线芯部分	0.01mm × 70个位置(可调整范围0.7mm)	
	绝缘部分	0.15mm × 18个位置(可调整范围2.55mm)	
压接冲程		30 mm	
端子送料方式		机械送料或气动送料	
端子送料时序		预送料或后送料	
剥皮 - 压接设备		可用 *	---

* 需要更改为40mm冲程送料凸轮

tooling.tycoelectronics.com
2008.01 发行 编号:7-1773449-0

香港办事处
电话: 852-27351628
传真: 852-27350243
深圳办事处
电话: 86-755-25154700
传真: 86-755-25980416

广州办事处
电话: 86-20-86693535
传真: 86-20-86679840
长春办事处
电话: 86-431-88964709
传真: 86-431-88981143

北京办事处
电话: 86-10-65693200
传真: 86-10-65693208
上海办事处
电话: 86-21-24071588
传真: 86-21-24071599

武汉办事处
电话: 86-27-68850166
传真: 86-27-68850177
重庆办事处
电话: 86-23-89808860
传真: 86-23-89808865

台北办事处
电话: 886-2-87682788
传真: 886-2-87681866
青岛办事处
电话: 86-532-66777080
传真: 86-532-85026500

HDE 模具



HDE的自对中压接刀片及底刀可用于其他的JAM类型的模具上。



固定的送料行程设计使最终送料位置的调整得以轻松完成。



通过送料导轨定位螺丝调整喇叭口。

HDE Applicator

Features

- JAM-style crimping machine interface
- Precision Crimp Height (C/H) dials
- Easy Bell-Mouth adjustment
- Side-Feed and End-Feed available
- Crimpers and Anvils applicable to JAM-style applicators
- Metric design



The HDE is one of Tyco quality applicator families which works with JAM-style crimping machines generally available in Asia. The HDE has precision and wide-range crimp height dials for wire and insulation. This crimp height adjustment function provides wider crimping machine selection and easier crimp quality management at harness making processes.



Insulation C/H Dial



Wire C/H Dial

Specifications

Items		Side Feed	End Feed
Crimp Height Dial	Wire	0.01 mm x 70 positions (0.7 mm adjustable range)	
	Insulation	0.15 mm x 18 positions (2.55 mm adjustable range)	
Press Stroke		30 mm	
Terminal Feed Derive		Mechanical - Feed or Air - Feed	
Terminal Feed Timing		Pre - Feed or Post Feed	
Stripper - Crimper Machine		Applicable*	---

* should be replaced by 40 mm Feed - Cam

TE Logo and Tyco Electronics are trademarks

tooling.tycoelectronics.com
Released 01-2008 Number :7-1773449-1

Hongkong
Tel: 852-27351628
Fax: 852-27350243
Shenzhen
Tel: 86-755-25154700
Fax: 86-755-25980416

Guangzhou
Tel: 86-20-86693535
Fax: 86-20-86679840
Changchun
Tel: 86-431-88964709
Fax: 86-431-88981143

Beijing
Tel: 86-10-85693200
Fax: 86-10-65693208
Shanghai
Tel: 86-21-24071588
Fax: 86-21-24071599


Wuhan
Tel: 86-27-68850166
Fax: 86-27-68850177
Chongqing
Tel: 86-23-89808860
Fax: 86-23-89808865

Taipei
Tel: 886-2-87682788
Fax: 886-2-87681866
Qingdao
Tel: 86-532-66777080
Fax: 86-532-85026500

HDE Applicator



Self-alignment Crimpers and Sprit Anvils for HDE can be used at other JAM-style applicators.

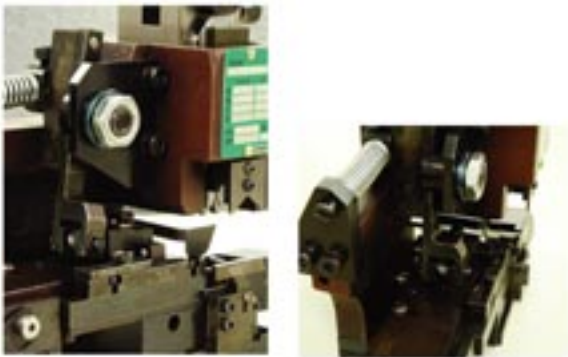

Fixed feed stroke design provides easy adjustment of the terminal feed-end position.



Bell-Mouth adjustment by the Feed-Track position tuning.
