

Modular Plug Dual Terminator

Termination and Simultaneous Testing of
Telephone Cords with AMP Modular Plug Connectors

APPLICATION
TOOLING


AMP

Product features

- Simultaneous termination of two connectors
- Termination from the reel
- Automatic testing for continuity and short circuits
- Termination of coiled cords, wall cords and extension cords possible

Technical features

- Power supply: 230 V AC, 50-60 Hz, 2 A
- Flexible working light: connection 24 V, light voltage 12 V
- Compressed air supply: 400-600 kPa dry and oil-free air
- Air consumption: approx. 30 l/min
- Dimensions: Height = 1150 mm
Depth = 565 mm
Width = 740 mm
- Weight: approx. 100 kg
- Cycle time: approx. 2,5 s
- Production: 10-15 cords per minute, depending on the operator
- Noise level: < 70 dB (A)

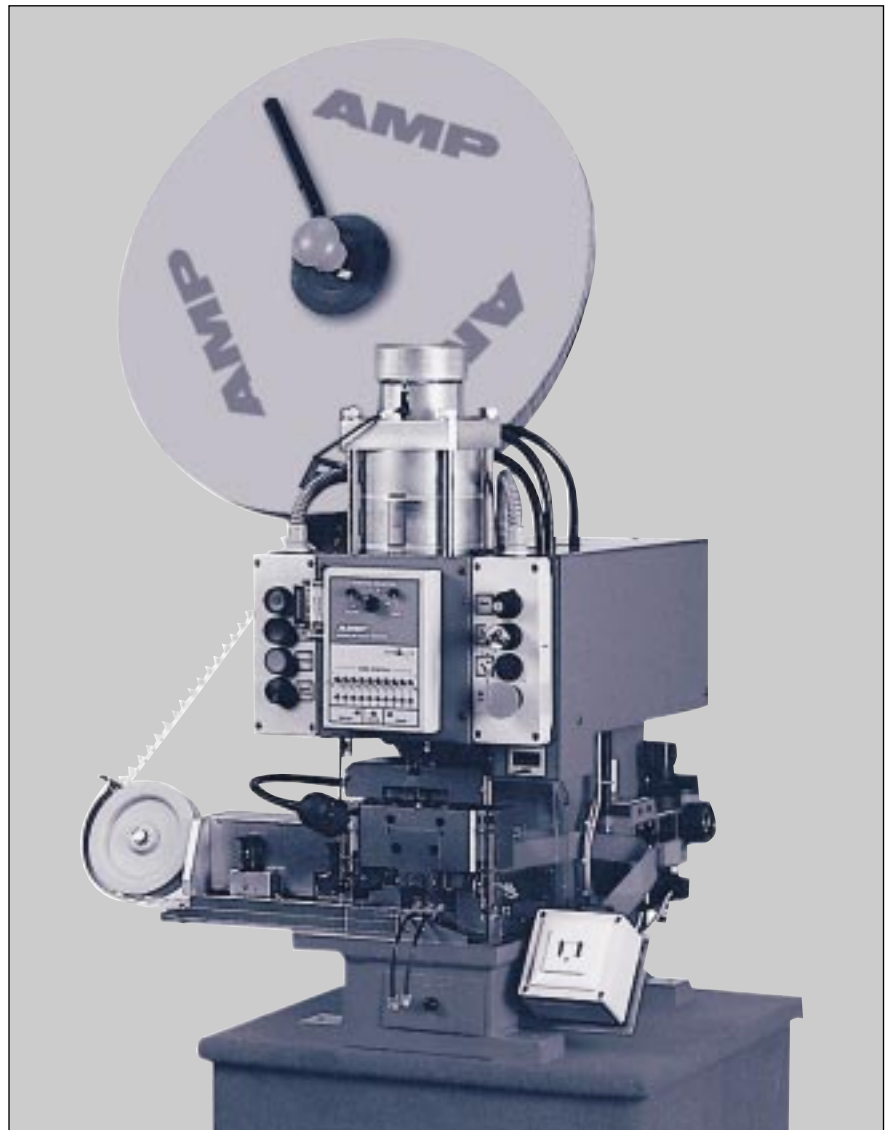

Cord to be processed

- Coiled hand appliance cord, 4-core, D shape as per DIN 47467 part 5
- Connecting cord, 4 or 6-core, flat oval, as per DIN 47467 part 3

AMP products which can be processed

- Modular Plug Connectors 4- and 6 position

The AMP Modular Plug Dual Terminator is a semi-automatic crimping machine. For production of double-ended cable assemblies.

The Modular Plug Dual Terminator can be converted to single-ended termination of wall cords, by applying a TAE connector.

